
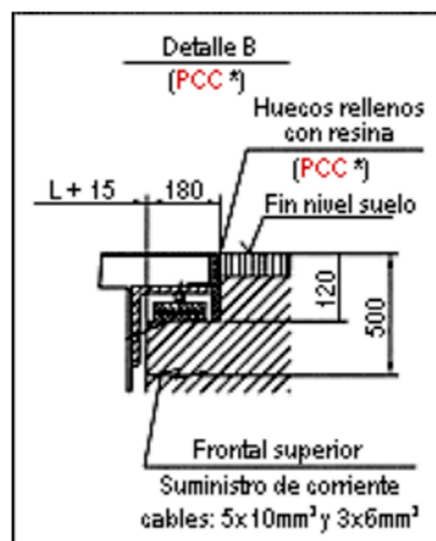


Esquema técnico orientativo de la escalera mecánica INYMAN Itaka

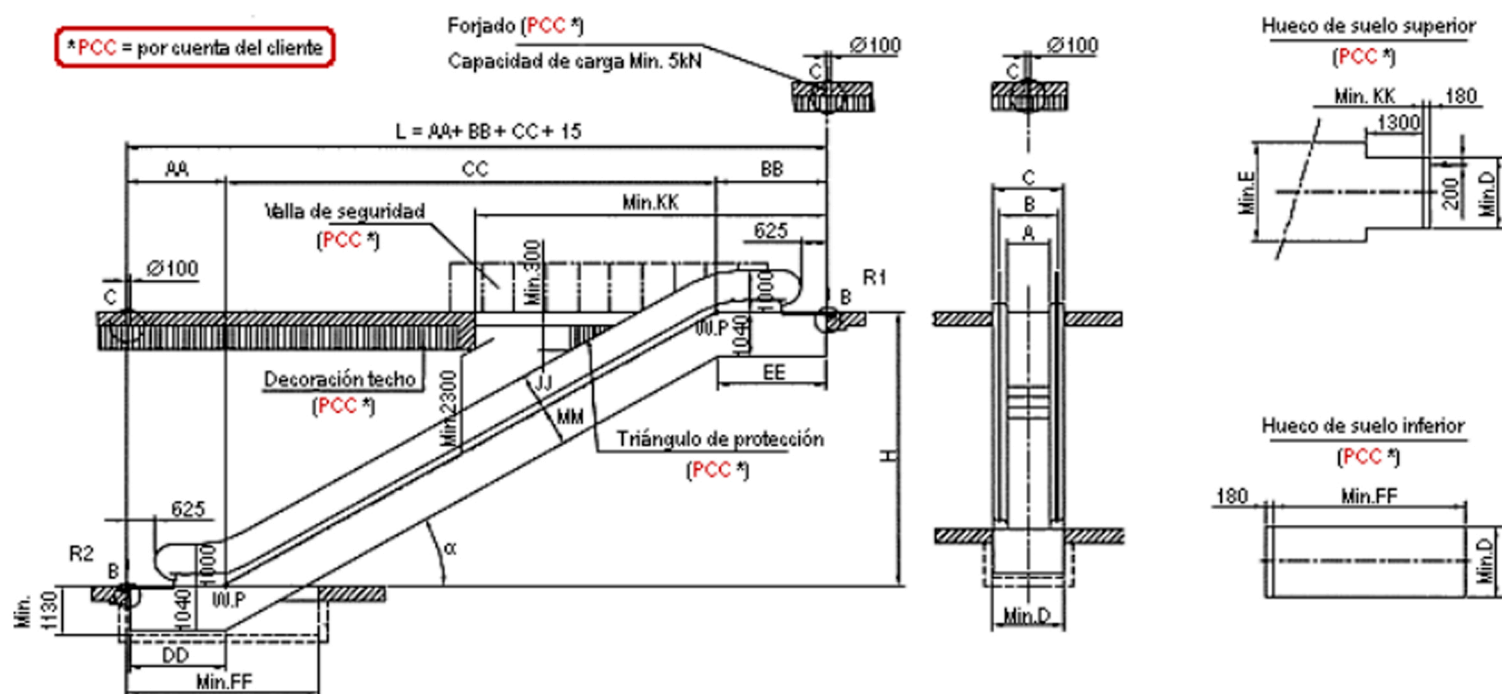

A	600	800	1000
B	830	1030	1230
C	1195	1395	1595
D	1250	1450	1650
E	1910	2110	2310
F	15000		

A	R(KN)	
	SIN soporte intermedio	CON soporte intermedio
600	$R1 = 4.1 \cdot L + 16.5$	$R1 = 4.1 \cdot L2 + 14.5$
	$R2 = 4.1 \cdot L + 9$	$R2 = 4.1 \cdot L1 + 7.1$
		$R3 = 4.25 \cdot L + 9.5$
800	$R1 = 4.5 \cdot L + 18$	$R1 = 4.5 \cdot L2 + 16.1$
	$R2 = 4.5 \cdot L + 10$	$R2 = 4.5 \cdot L1 + 7.8$
		$R3 = 4.7 \cdot L + 10.5$
1000	$R1 = 5 \cdot L + 19.5$	$R1 = 5 \cdot L2 + 17.5$
	$R2 = 5 \cdot L + 11$	$R2 = 5 \cdot L1 + 8.5$
		$R3 = 5.2 \cdot L + 11.5$

Nota: L, L1, L2 en metros. L1 y L2 no más de 15m.