


Esquema técnico orientativo de los ascensores eléctricos **INYMAN**.

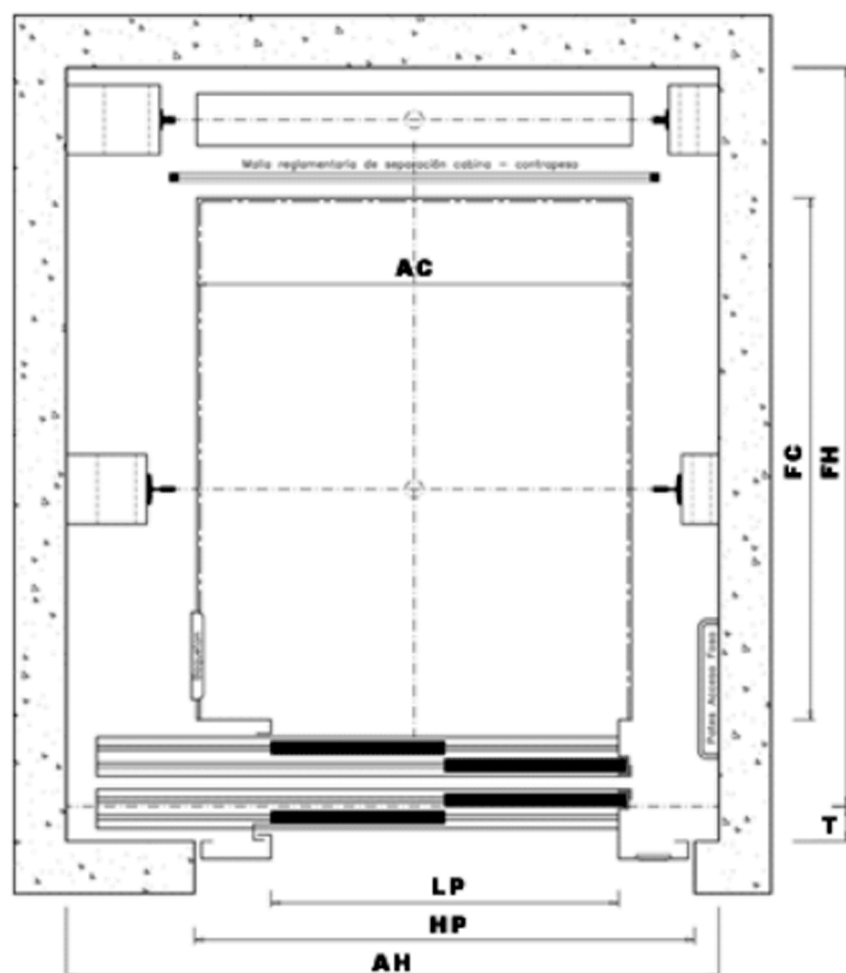

Todo · General · Hueco · Cabina

nº personas	carga (kg.)	AC (mm.) [Ancho cabina]	FC (mm.) [Fondo cabina]	AH (mm.) [Ancho hueco]	FH (mm.) [Fondo hueco]	HP (mm.) [Hueco puertas]	LP (mm.) [Luz puerta]	T (mm.) [Tacón]
4	300	1000	900	1350	1360	1050	700	consultar
6	450	1050	1200	1500	1670	1150	800	80
8	600	1100	1400	1600	1850	1150	800	consultar
10	750	1400	1350	1850	1800	1250	900	consultar
13	1000	1600	1400	2050	1850	1250	900	consultar
16	1250	1700	1500	2150	2000	1350	1000	consultar
20	1500	1900	1750	2350	2300	1350	1000	consultar