


Esquema técnico orientativo de los ascensores hidráulicos **INYMAN**.

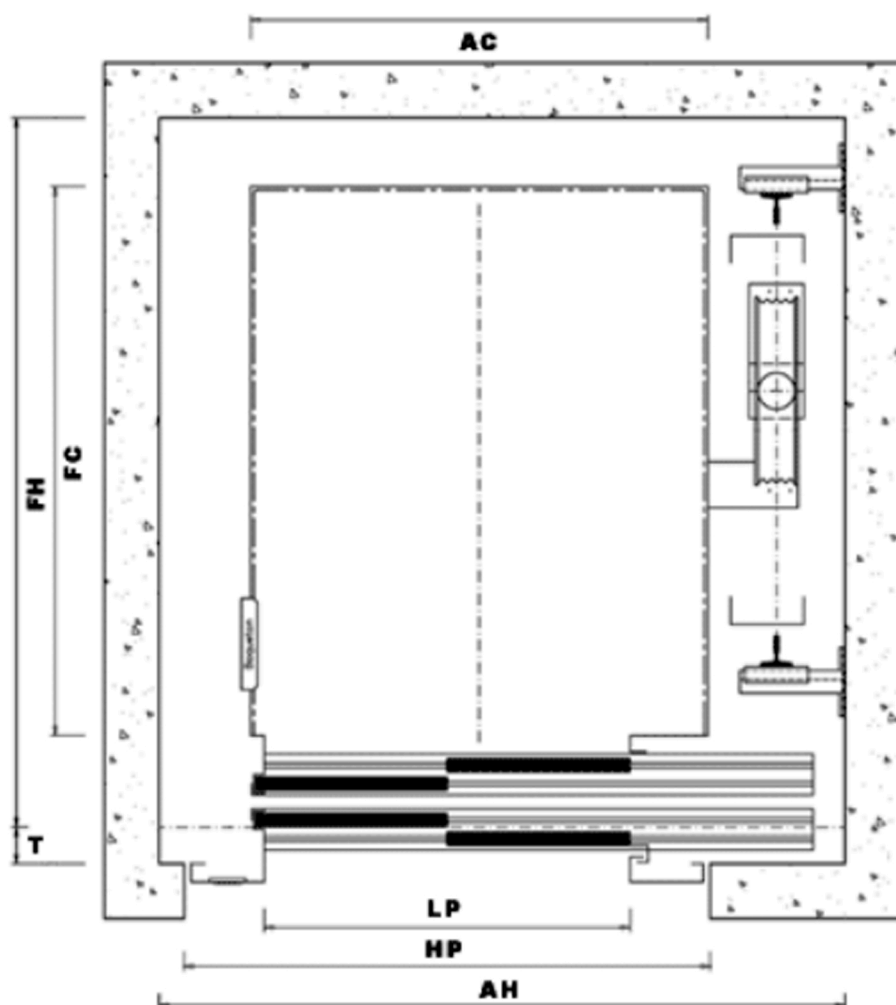

Todo · General · Hueco · Cabina

nº personas	carga (kg.)	AC (mm.) [Ancho cabina]	FC (mm.) [Fondo cabina]	AH (mm.) [Ancho hueco]	FH (mm.) [Fondo hueco]	HP (mm.) [Hueco puertas]	LP (mm.) [Luz puerta]	T (mm.) [Tacón]
4	300	1000	900	1350	1400	1050	700	consultar
6	450	1050	1200	1500	1575	1150	800	80
8	600	1100	1400	1575	1780	1150	800	consultar
10	750	1400	1350	1875	1700	1250	900	consultar
13	1000	1400	1600	1875	1950	1250	900	consultar
16	1250	1700	1500	2500	1900	1350	1000	consultar
20	1500	1900	1750	2700	2050	1350	1000	consultar