


Esquema técnico orientativo de la plataforma hidráulica INYMAN-1

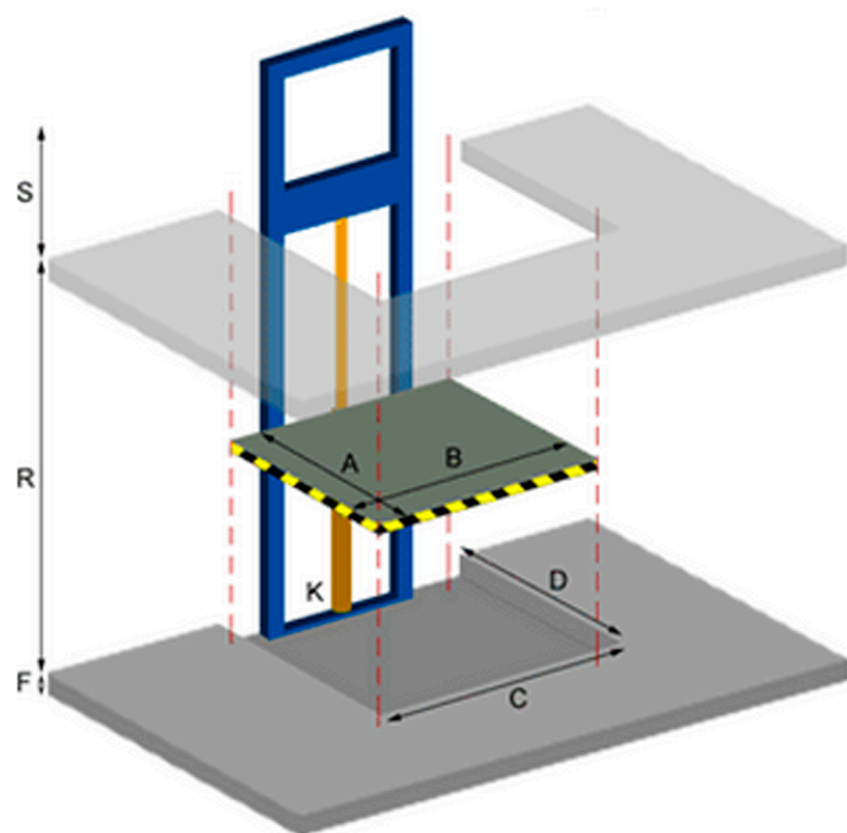

Proyección del recorrido

Carga (kg.)	max A (mm.)	max B (mm.)	max C (mm.)	max D (mm.)	max F (mm.)	max K	max S (mm.)
100	1200	1200	1250	1350	200	900	1100
200	1200	1200	1250	1350	200	1000	1100
300	1200	1200	1250	1350	200	1100	1100
400	1400	1200	1450	1350	200	1300	1100
500	1400	1200	1450	1350	200	1500	1100
750	1500	1500	1550	1690	400	2000	1300
1000	2000	1600	2050	1790	400	2500	1300

K: Carga reacción en losa