


Esquema técnico orientativo de la plataforma hidráulica INYMAN-2

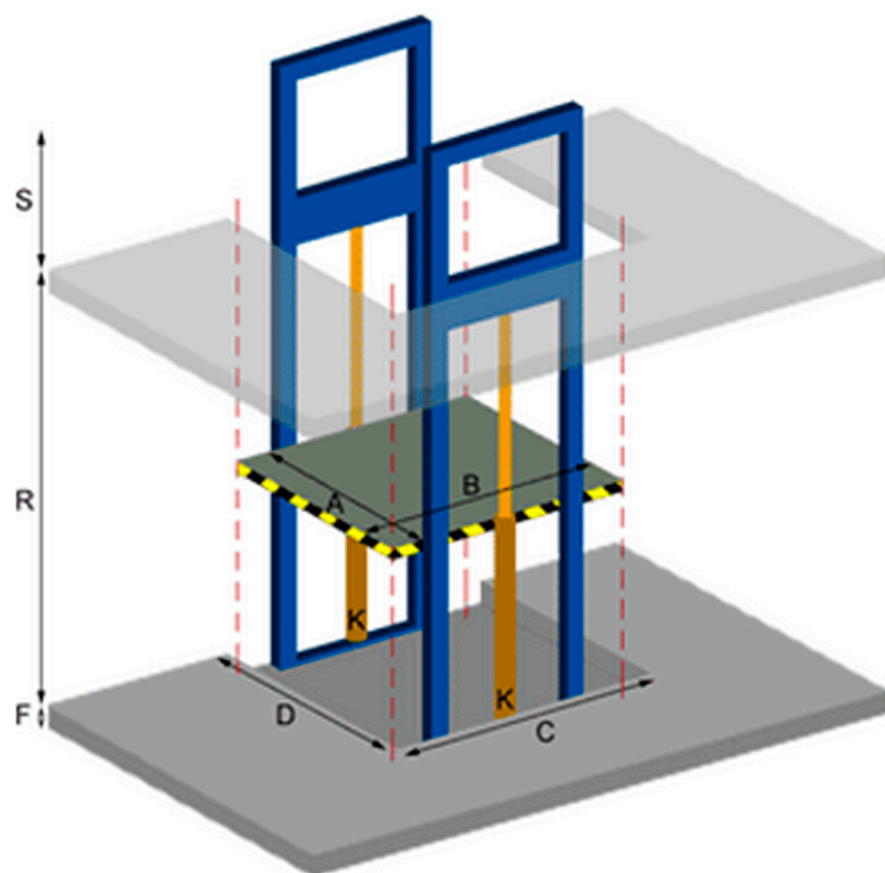

Proyección del recorrido

Carga (kg.)	max A (mm.)	max B (mm.)	max C (mm.)	max D (mm.)	max F (mm.)	max K	max S (mm.)
1000	3000	1500	3050	1780	500	1500	1300
2000	5000	2500	5550	2860	600	2500	1500
3000	5000	2500	5550	2900	600	3700	1700
4000	5000	2500	5550	2950	600	5000	2000
5000	5000	2500	5550	3000	600	5500	2000
6000	5000	2500	5550	3050	700	6500	2200
8000	5000	2500	5550	3100	850	8600	2200
10000	5000	2500	5550	3150	1000	12000	2200

K: Carga reacción en losa