


Esquema técnico orientativo de la plataforma hidráulica INYMAN-X

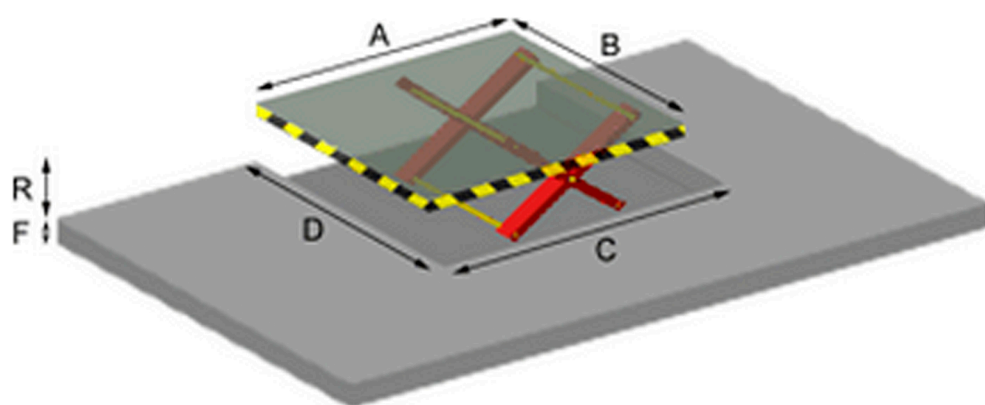

Carga (kg.)	max R (mm.)	max A (mm.)	max B (mm.)	max C (mm.)	max D (mm.)	max F (mm.)
500	1300	2200	1600	2250	1650	230
1000	2100	3300	2200	3350	2250	350
1500	3000	5000	2500	5050	2550	480
2000	3600	6000	2500	6050	2550	560
3000	3600	6000	2500	6050	2550	600
4000	3600	6000	2700	6050	2750	630
5000	3600	6000	2700	6050	2750	660
6000	3600	6000	2700	6050	2750	680